



A & C Plastics, Inc.
 6135 Northdale
 Houston, TX
 77087-5095

Phone Numbers
 Sales: 713.645.4915
 Fax: 1.800.627.5899
 Toll Free: 1.800.231.4175

Email Addresses
 plastic@acplasticsinc.com
 sales@acplasticsinc.com

Makrolon Hygard CG750

Product Data


MAKROLON HYGARD® CG750 laminate is a three-ply MAKROLON polycarbonate sheet for higher level architectural glazing security applications. MAKROLON HYGARD CG750 laminate features abrasion and UV resistant surfaces for extended service life in harsh environments.

APPLICATIONS

MAKROLON HYGARD CG750 laminate is used in jails, detention facilities, and psychiatric hospitals as containment glazing for protection against forced entry/ egress into or from controlled areas.

Typical Physical Properties	
Gauge/Tolerance	.780 ± 5%
Weight	4.9 lbs./s.f.
Shading Coefficient	.87
% Light Transmittance	77% (clear)
Colors	Standard: Clear Custom Colors on request
Sheet Sizes	Standard: 38" x 96" 48" x 96" 60" x 96" Custom Sizes on request

MARKROLON HYGARD CG750 Laminate

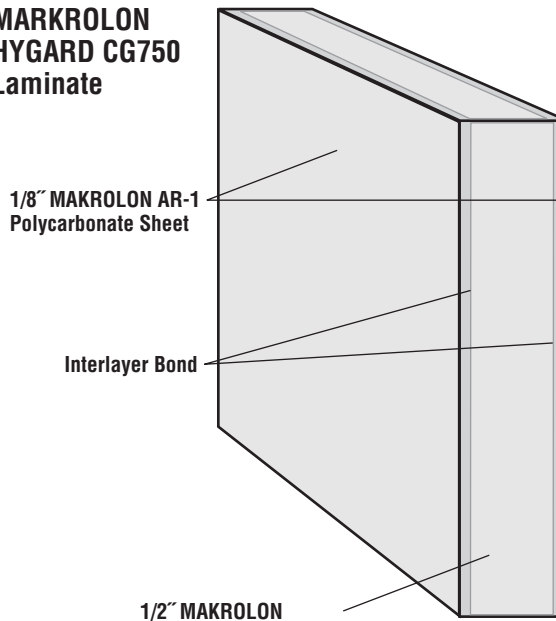

FORCED ENTRY, BALLISTICS RATINGS
H.P. WHITE TP 0500.01 Level IV Step 31
H.P. WHITE TP 0500.01 Level B Ballistics (9mm)
ASTM F 1233 Class IV Step 26



A&C Plastics, Inc. will not be responsible for the use of this information relative to actual application. Users must make their own determination of its suitability for their specific application. No warranty is made for the fitness of any product, and nothing herein waives any of the seller's conditions of sale.



A & C Plastics, Inc.
6135 Northdale
Houston, TX
77087-5095

Phone Numbers
Sales: 713.645.4915
Fax: 1.800.627.5899
Toll Free: 1.800.231.4175

Email Addresses
plastic@acplasticsinc.com
sales@acplasticsinc.com

Makrolon Hygard CG750

Product Data

GLAZING INFORMATION

- Use of structural security framing systems with equal or greater forced entry and/or ballistics ratings as the selected MAKROLON HYGARD laminate is recommended.
- Size MAKROLON HYGARD laminates to allow for a minimum of 1" edge engagement in the frame, with sufficient rabbet depth for material expansion (approx. 1/16" ft.).
- Use wet or dry sealants/gaskets that are compatible with polycarbonate.
- Remove protective masking after glazing operations are completed and before prolonged exposure to direct sunlight, moisture, or high temperature.

CLEANING INSTRUCTIONS

- Rinse with clean water to remove abrasive dust and dirt.
- Wash with soap or mild detergent using a sponge or soft cloth. Do not scrub.
- Rinse once more. Dry with a soft cloth or chamois to prevent water spots.
- To remove labels, stickers, or grease, rub gently with a cloth wetted thoroughly in VM & P naphtha or isopropyl alcohol. Wash and rinse. Do not use razor blades, scrapers, or squeegees.

Product Specification

MAKROLON HYGARD CG750 laminate:

Three-ply, clear MAKROLON polycarbonate sheet constructed as follows:

- 1/8" MAKROLON polycarbonate sheet with high AR abrasion-resistant surface
- Polyurethane bonding interlayer
- 1/2" MAKROLON polycarbonate sheet
- Polyurethane bonding interlayer
- 1/8" MAKROLON polycarbonate sheet with high AR abrasion-resistant surface

Material shall have a flexural strength of at least 13,500 psi per ASTM D-790; and shall have AR (high performance abrasion-resistant) surfaces for enhanced service life and resistance to marring. Material shall exhibit a self ignition temperature of 1077°F and a flash ignition temperature of 872°F (ASTM D-1929), and conform with ICBO & BOCA Model Building Codes as a CC-1 rated Approved Light Transmitting Plastic.



A&C Plastics, Inc. will not be responsible for the use of this information relative to actual application. Users must make their own determination of its suitability for their specific application. No warranty is made for the fitness of any product, and nothing herein waives any of the seller's conditions of sale.